


TYPICAL DRIVEWAY APPROACH

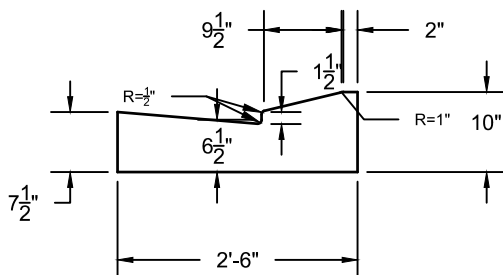

MOUNTABLE CURB DETAIL

NOTE:

1. CURB, GUTTER, SIDEWALK, AND DRIVEWAY APPROACH SHALL HAVE 6" OF CRUSHED BASE UNDER CONCRETE.
2. FOR RECONSTRUCTION, PAVEMENT SHALL BE SAW CUT 2' FROM GUTTER TO ALLOW FOR FORM PLACEMENT AND PROPER COMPACTION OF BASE COURSE.



MOUNTABLE DRIVEWAY DETAIL

SP 02776-05

N.T.S.

7/2018